




parede - wall mounted

**descrição** description ·



- Aplique de parede construído em perfil de alumínio adequado para aplicação exterior.
- Caracterizado pelas linhas rectas e leveza visual.
- Proporciona uma iluminação indirecta pontual muito agradável.
- Várias possibilidades de adaptação de lâmpadas: LEDs, lâmpadas halogéneo suporte GU10 ou GU5.3.
- Acabamento cor cinza texturado.
- Algumas versões obrigam à instalação no exterior de um driver ou transformador.

- Range of aluminium wall mounted luminaire suitable for outdoor installation.
- Geometric shaped luminaire with emphasis on simplicity of line due to its slim section.
- Light output directed downwards.
- Pleasant indirect focused light effect to suit differing applications.
- Variety of lamp types: LED to GU10 or GU5.3 lamp holder halogen lamps.
- Standard finish in Textured Grey.
- External power unit required for operation on some versions.

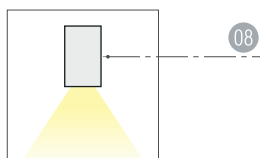**pormenores** details ·**acabamento** finishing ·

- 08 Cinza Texturado *Textured Grey*

simbologia symbols ·

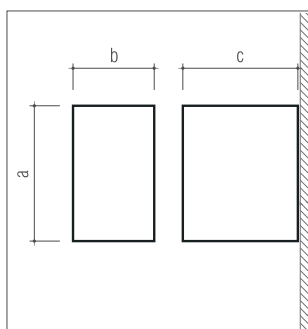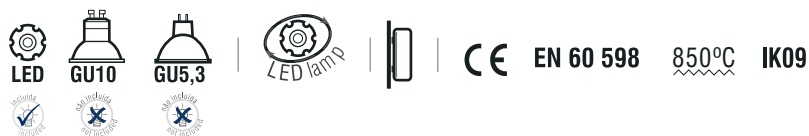

Cód.	W		(mm)			kg	(dm <sup>3</sup> )	IP	Classe	Driver/transf.
			a	b	c					
33.02.001.01.00	1x1,2 W 350mA	LED	100	60	85	0,43	12,4	40	◇	sim yes*
33.02.001.01.03	1x1,2 W 350mA	LED	100	60	85	0,43	12,4	65	◇	sim yes*
33.02.001.01.01	max. 50 W 230V	GU10 - Halog.	100	60	85	0,39	12,4	40	⊕	não no*
33.02.001.01.05	max. 5 W 230V	GU10 - LED	100	60	85	0,42	12,4	40	⊕	não no*
33.02.001.01.02	max. 50 W 12V	GU5,3 - Halog.	100	60	85	0,38	12,4	40	◇	sim yes*
33.02.005.01.00	max. 5 W 12V	GU5,3 - LED	100	60	85	0,43	12,4	40	◇	sim yes*

\*Requer driver ou transformador instalado exteriormente – não incluído . External driver or power unit required for operation – not included.

lâmpadas lamps ·

LED 1W (LDL 003 P)



LED 1W (ODL 003 P)



Dicroica Max 50W . GU10



LED Max 5W . GU10



Dicroica Max 50W . GU5,3



LED Max 5W - GU5,3

